


Bifacial Double Glass Module (Black Thru)

DAS-DH96NE-455

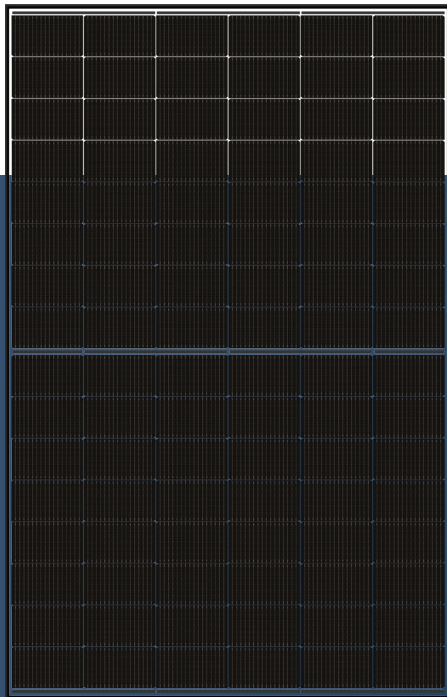


Key Features

- High Efficiency**
 Leading module efficiency in industry, up to 22.8%
- Excellent Appearance and Performance**
 Bifacial solar cell, symmetrical design, low risk of micro-crack
- High Reliability**
 25 years materials warranty, 30 years power warranty
- Excellent Rear Side Power Generation**
 Bifaciality is up to 80%, up to 30% more energy yield than conventional modules
- Better low irradiance performance**
 Higher power output even under low irradiance environments like on cloudy or foggy days
- Extensive Application Scenes**
 More extensive application scenes, such as snow field, vertical installation, high humidity, strong wind and desert region

Maximum Power Output	Maximum Module Efficiency	Power Output Tolerance
455W	22.8%	0~+5W

Product and Quality Certifications


- IEC 61215, IEC 61730
- ISO 9001: Quality Management System
- ISO 14001: Environment Management System
- ISO 45001: Occupational Health and Safety Management System

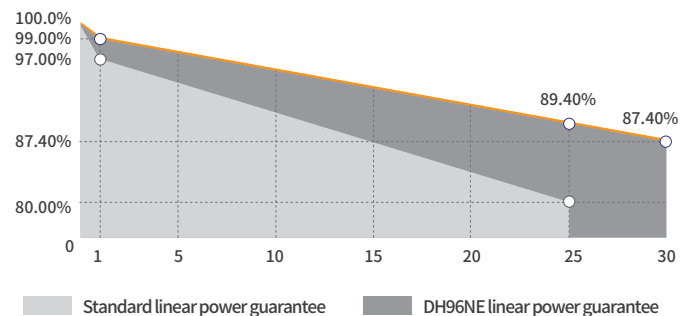


Leading Product and Power Warranty

1.00% 1st-year Degradation **0.40%** Annual Degradation **25** Years materials and workmanship warranty **30** Years linear power warranty

Engineering Drawing (MM)

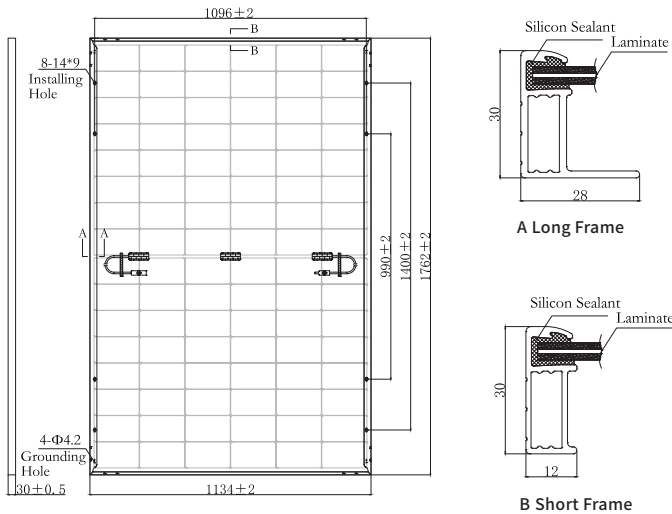

Characteristic Curves(455W)

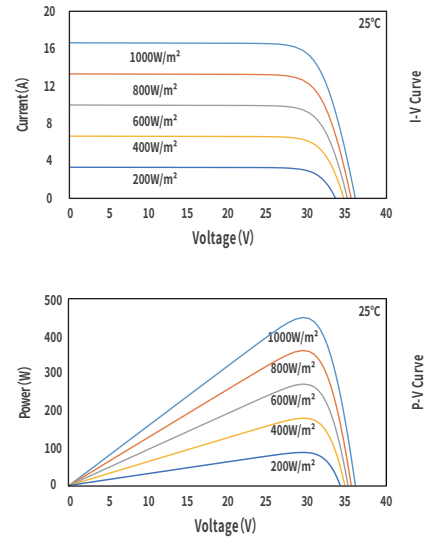

Electrical Parameters (STC *)

Nominal Max. Power(Pmax/W) ±3%	455
Open Circuit Voltage(Voc/V) ±3%	35.50
Short Circuit Current(Isc/A) ±5%	16.16
Operating Voltage(Vmp/V)	30.22
Operating Current(Imp/A)	15.06
Efficiency(%)	22.8
Isc-BSI	19.97 ±5%

STC * : Irradiance = 1000 W/m², Cell Temperature = 25°C, AM = 1.5
Test condition is based on the front side

Mechanical Parameters

Cell Type	N Type
Module Size	1762 × 1134 × 30mm
Glass Thickness	1.6mm + 1.6mm
Module Weight	21.6Kg
Output Cable	4mm ² , cable length 1200mm(can be customized)
Connector	See note
Junction Box	IP68, 3 bypass diodes
Frame	Anodized aluminium alloy (Black)

Connector*: 1.PV-DA01M2-XY / PV-DA02M2-XY (DAS Solar) 2.PV-ZH202B (Zhejiang Zhonghuan)
3.PV-KST4-EVO2/xy_UR,PV-KBT4-EVO2/xy_UR (Staubli)
4.PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy (Staubli)
5.PV-JK03M2/xy (Plug+Socket) (Jinko)

Electrical Parameters (NMOT *)

Nominal Max. Power(Pmax/W) ±3%	347
Open Circuit Voltage(Voc/V) ±3%	33.99
Short Circuit Current(Isc/A) ±5%	13.03
Operating Voltage(Vmp/V)	28.56
Operating Current(Imp/A)	12.14

NMOT * : Irradiance = 800 W/m², Ambient Temperature = 20°C, AM = 1.5,
Wind Speed = 1 m/s
Test condition is based on the front side

Temperature Coefficients

Short Circuit Current(Isc)	+0.045%/°C
Open Circuit Voltage(Voc)	-0.250%/°C
Nominal Max. Power(Pmax)	-0.280%/°C
NMOT	42 ±2°C

Electrical Parameters (BNPI *)

Nominal Max. Power(Pmax/W) ±3%	500
Open Circuit Voltage(Voc/V) ±3%	35.50
Short Circuit Current(Isc/A) ±5%	17.87
Operating Voltage(Vmp/V)	30.22
Operating Current(Imp/A)	16.66

BNPI * : front irradiance=1000W/m², rear irradiance=135W/m²,
Cell Temperature = 25°C, AM = 1.5
Pmax bifaciality coefficient 80 ±5%, Voc bifaciality coefficient 95 ±5%
Isc bifaciality coefficient 80 ±5%

Operating Parameters

Max. System Voltage	DC1500V
Power Measurement Tolerance	±3%
Module[T98] max[°C]	70
Max. Fuse Rated Current	30A
Fire Safety Class	Class C
Test Load	Front 5400Pa , Back 2400Pa
Packing Data	36 pcs/Pallet; 216(20GP); 936(40HQ)